


DIMENSIONS TABLE	RADIUS	MAX WIDTH 2 CAR GARAGE OR LESS	MAX WIDTH 3 CAR GARAGE OR MORE
RESIDENTIAL	20'	30'	36'
NON - RESIDENTIAL	50'	40'	40'

SEE NOTE 3

NOTES:

- 1) DITCH BOTTOMS TO HAVE BALLAST COMP. IN PLACE, 3" MIN. DEPTH IF ROAD GRADE IS 5% OR STEEPER.
- 2) THE NEED FOR CORRUGATED METAL PIPE, SIZE, & LOCATION TO BE DETERMINED BY THE COUNTY ENGINEER.
- 3) NEAT VERTICAL SAW CUT & TACK EDGES OF EXISTING PAVEMENT.
- 4) APPROACH SHALL BE PAVED TO THE RIGHT OF WAY LINE OR 30' FROM CENTERLINE. WHICHEVER IS LESS.
- 5) CONCRETE ONLY ALLOWED FOR RESIDENTIAL APPROACHES WHEN THE PAVED WIDTH IS A LEAST 12 FEET WHEN MEASURED FROM CENTERLINE.
- 6) DEPENDING ON THE SITUATION THE DIMENSIONS SHOWN HEREON MAY BE VARIED AS REQUIRED BY THE COUNTY ENGINEER.

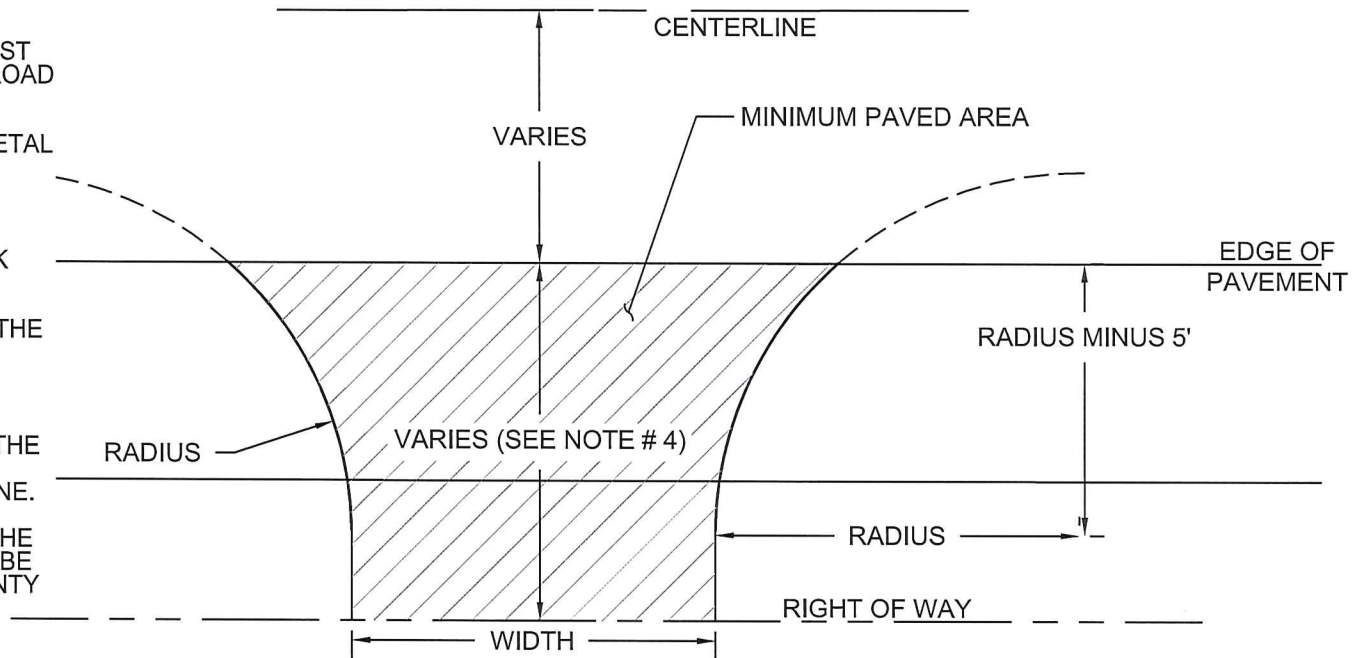

COUNTY ROAD APPROACH

APPROVED BY:

Matthew
 COUNTY ENGINEER

4/25/17
 DATE

STANDARD PLAN

R-3

SHEET 1 OF 1